

PIN HEADER 2.0mm

Pin Header 2.54mm 2 Row H=1.5/2.0mm Stack Straight Type




Specifications

Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | Standard Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated







ORDER INFORMATION

P	H	2	D	2	0	-	2	X	X	X	N	X	X	S	PA/PC	X	-	X
PD						No. of Pins Pr Row		Insulator Material Option		Contact Plating		PA/PC= Pin Lenght		Packing		1=Type 01		
15= 1.5mm 20= 2.0mm						2x40		A= BK-PBT B= BK-PA66 C= BK-PA6T D= BKPA46 F= BK-LCP		G0= Gold Flash G2= 5U" Gold G3= 10U" Gold G4= 15U" Gold G5= 30U" Gold S0= Gold Flash/ Tin SN= Tin				0= PE Bag A= Tray T= Tube P= Tube+Cap R= Reel+Cap		1=Type 02		

Recommended P.C.B Layout(Top Side)

(PCB BOARD TOLERANCE±0.05)

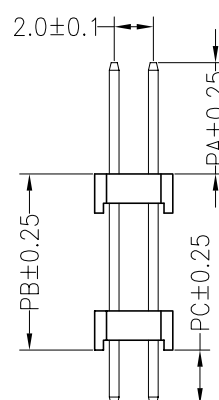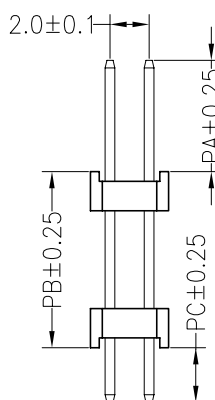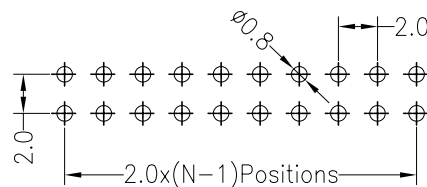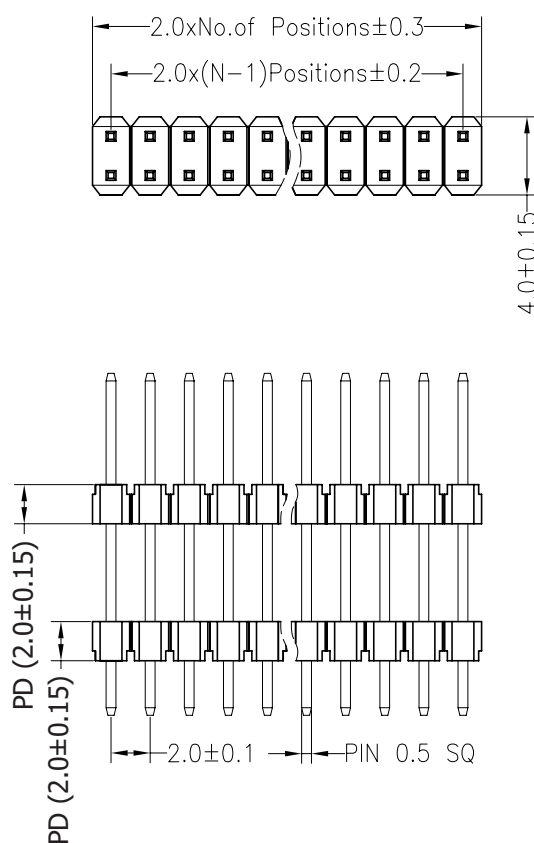

TYPE 02

TYPE 01

ITEM	PA	PC
Standard	4.00	2.80
Alternate		