

# PIN HEADER 2.0mm

## Pin Header 2.54mm 2 Row H=1.5/2.0mm Stack SMT Type

**TOPTTEK®**

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




### Specifications



Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |  
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

### Material


Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated




## ORDER INFORMATION

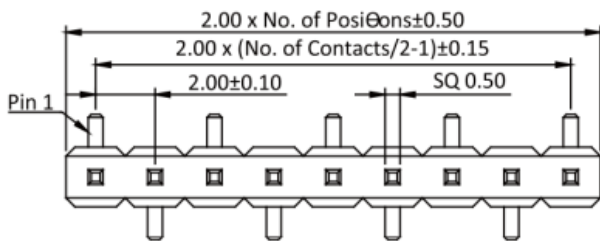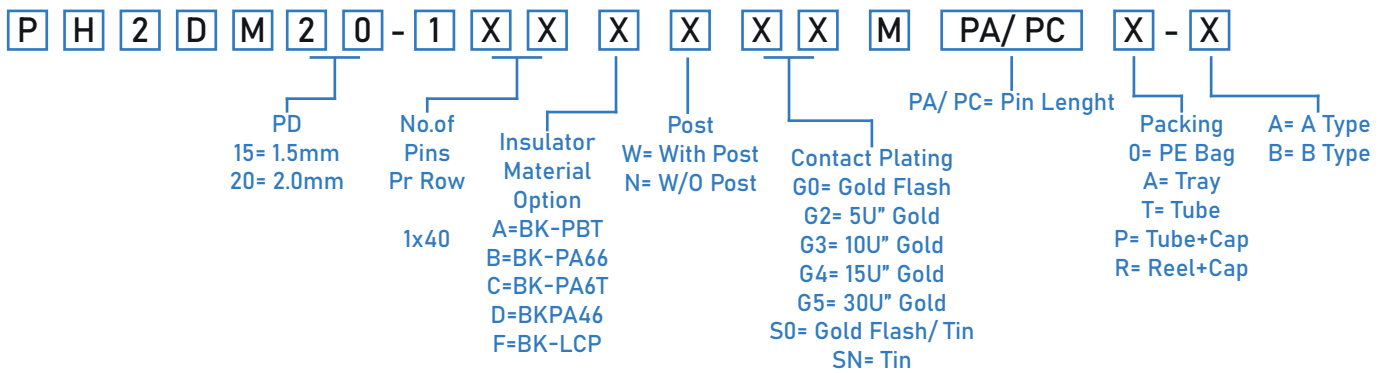


A Type

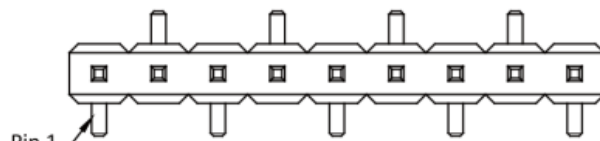

B Type


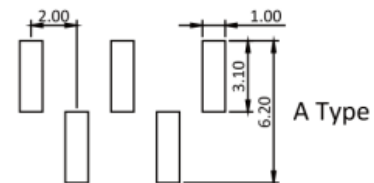


A Type

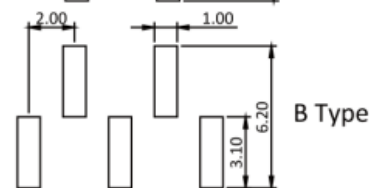

B Type

Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

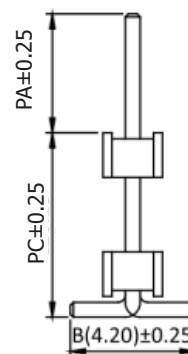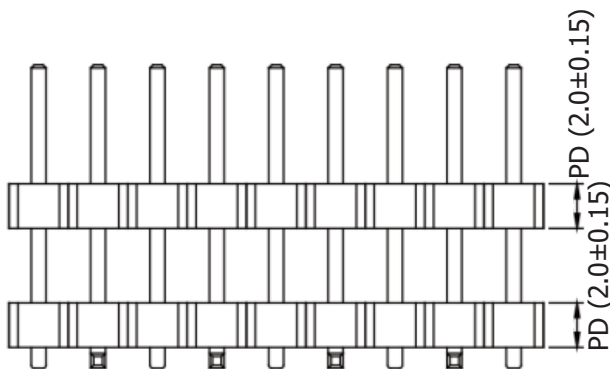

PD	PA
1.5mm	3.00mm
2.00mm	4.00mm

ITEM	PA	PC
Standard	4.00	6.20

Alternate