

PIN HEADER 2.0mm

Pin Header 2.54mm 2 Row H=1.5/2.0mm Stack SMT Type




Specifications

Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C


Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated







ORDER INFORMATION

P	H	2	D	M	2	0	-	2	X	X	X	X	X	X	M	PA/PB	X	
PD 15= 1.5mm 20= 2.0mm							No. of Pins Pr Row 2x40		Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BKPA46 F=BK-LCP		Post W= With Post N= W/O Post		Contact Plating G0= Gold Flash G2= 5U" Gold G3= 10U" Gold G4= 15U" Gold G5= 30U" Gold S0= Gold Flash/ Tin SN= Tin			PA/ PB= Pin Length		Packing 0= PE Bag A= Tray T= Tube P= Tube+Cap R= Reel+Cap

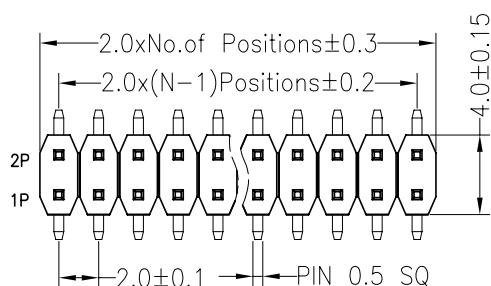

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

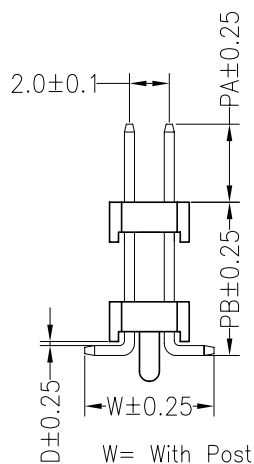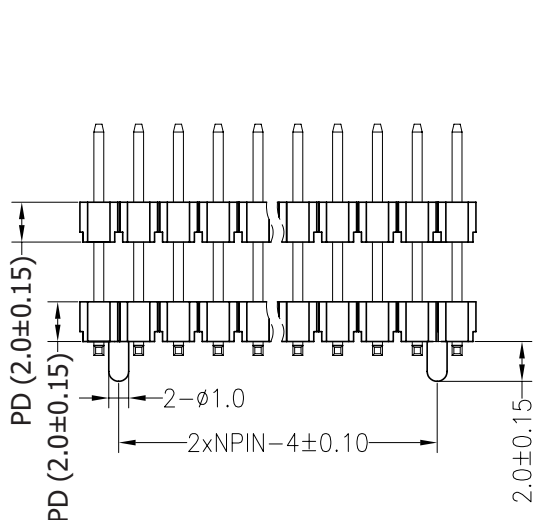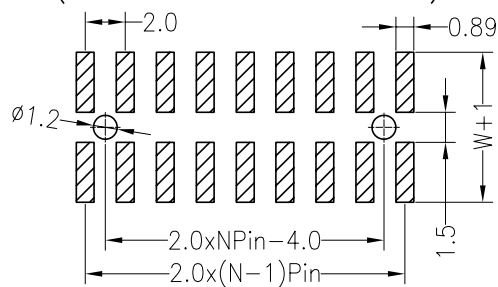

N= W/O Post

PD
1.50mm
2.00mm

ITEM	PA	PB
Standard	4.00	4.50
Alternate		