

PIN HEADER 2.0mm

Pin Header 2.54mm 1 Row H=1.5/2.0mm SMT R/A Type




Specifications

Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C


Material

Insulator: Polyester, UL 94V-0 | Standard Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated




ORDER INFORMATION



P	H	2	M	R	2	0	-	1	X	X	X	N	X	X	Z	PA/PC	X	
PD 15= 1.5mm 20= 2.0mm							No. of Pins Pr Row 1x40			Insulator Material Option A=BK-PBT B=BK-PA66 C=BK-PA6T D=BKPA46 F=BK-LCP			Contact Plating G0= Gold Flash G2= 5U" Gold G3= 10U" Gold G4= 15U" Gold G5= 30U" Gold S0= Gold Flash/ Tin SN= Tin			PA/ PC= Pin Length		Packing 0= PE Bag A= Tray T= Tube P= Tube+Cap R= Reel+Cap

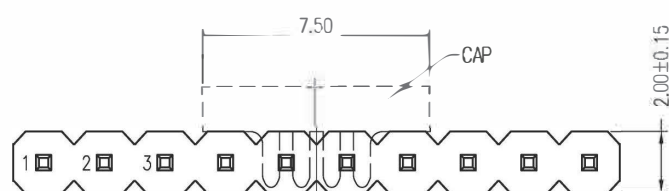


Dual Numbers

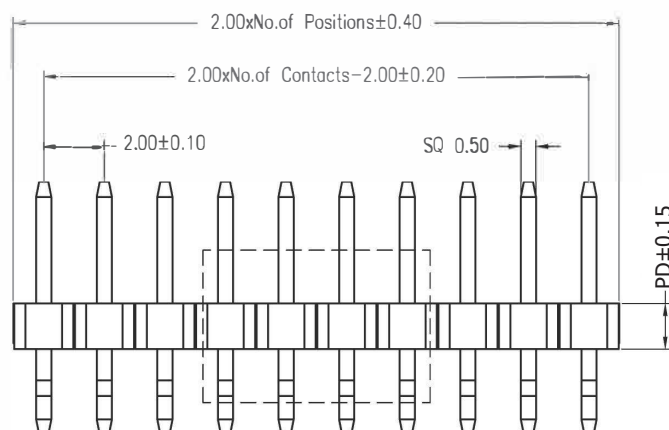

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

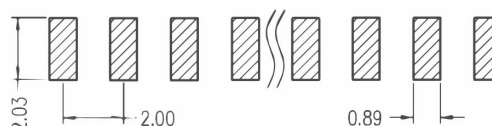

Odd Number



PD
1.50mm
2.00mm

ITEM	PA	PC
Standard	4.00	2.80
Alternate		