

# PIN HEADER 2.0mm

Pin Header 2.54mm 2 Row H=1.5/2.0mm SMT R/A Type

**TOPTTEK®**

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




RoHS 2002/95/EC

## Specifications



Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |  
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

## Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated






## ORDER INFORMATION

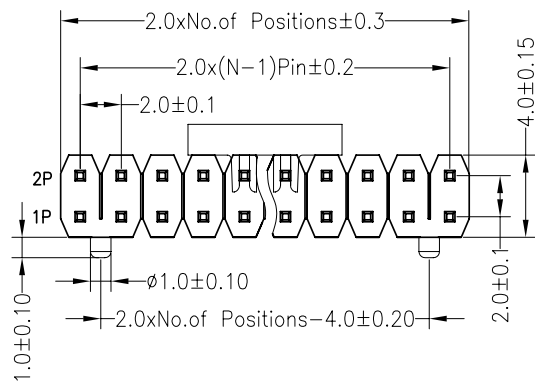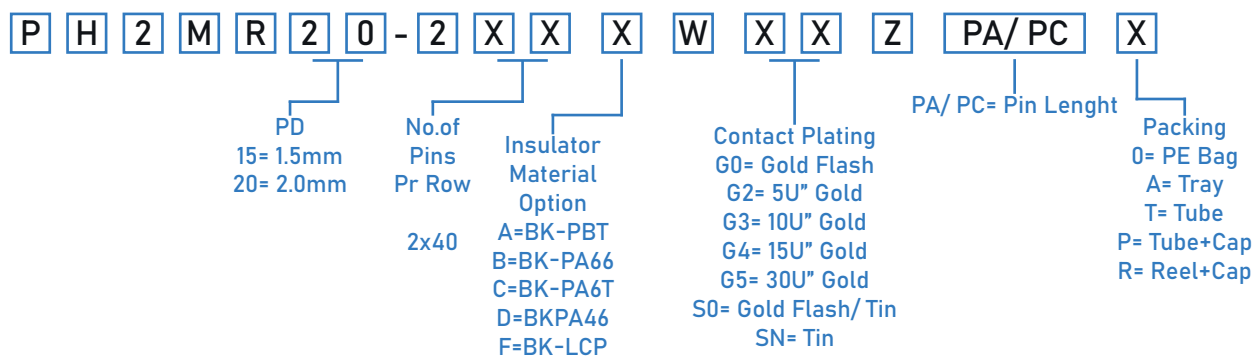

## Recommended P.C.B Layout (Top Side)

(PCB BOARD TOLERANCE ±0.05)

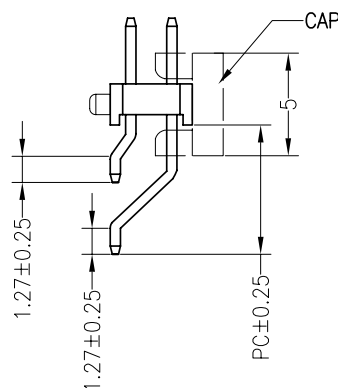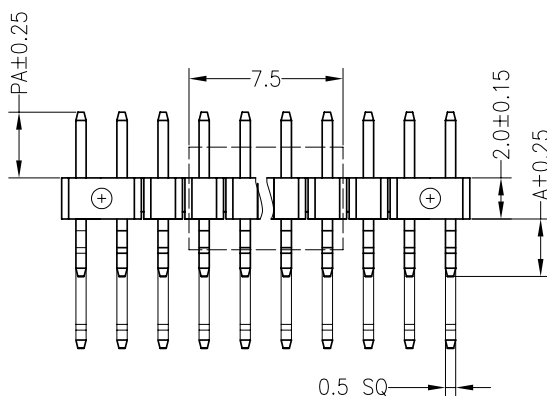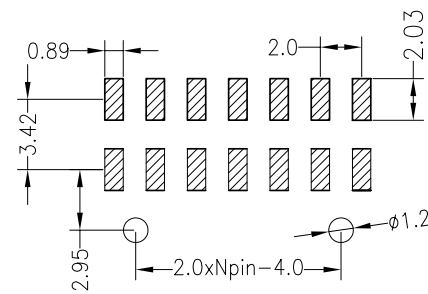

PD
1.50mm
2.00mm

ITEM	PA	PC
Standard	4.00	6.60

Alternate