

PIN HEADER 2.0mm

Pin Header 2.54mm 1 Row H=1.5/2.0mm Right Angle Type

TOPTTEK®

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




RoHS 2002/95/EC

Specifications

Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated







ORDER INFORMATION

P H 2 R 2 0 - 1 X X X N X X R PA/PB/PC X

- PH2R20**: PD
15= 1.5mm
20= 2.0mm
- 1**: No. of Pins Pr Row
1x40
- XXX**: Insulator Material Option
A= BK-PBT
B= BK-PA66
C= BK-PA6T
D= BKPA46
F= BK-LCP
- N**: Contact Plating
G0= Gold Flash
G2= 5U" Gold
G3= 10U" Gold
G4= 15U" Gold
G5= 30U" Gold
S0= Gold Flash/ Tin
SN= Tin
- XXR**: PA/PB/PC= Pin Length
- X**: Packing
0= PE Bag
A= Tray
T= Tube
P= Tube+Cap
R= Reel+Cap

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

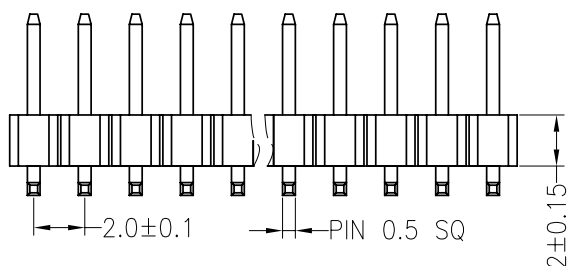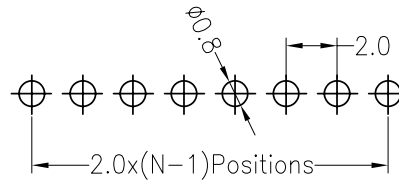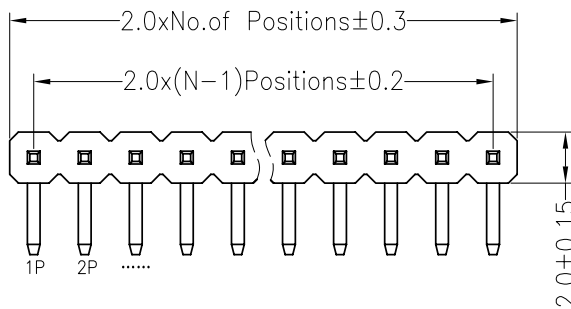

PD
1.50mm
2.00mm

ITEM	PA	PB	PC
Standard	4.00	3.15	2.80
Alternate			