


Pin Header 2.54mm 2 Row H=1.5/2.0mm Right Angle Type

Specifications


Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature:-40°C to +105°C

Material


Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



► ORDER INFORMATION

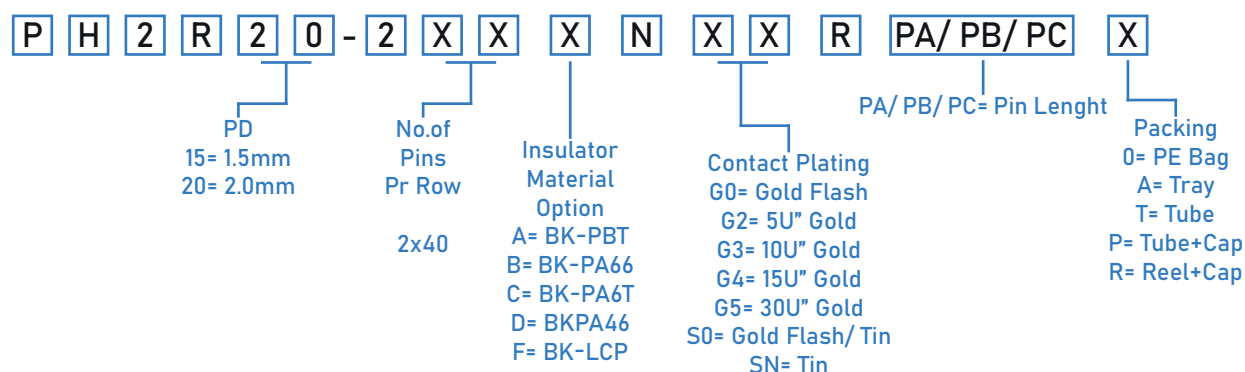

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

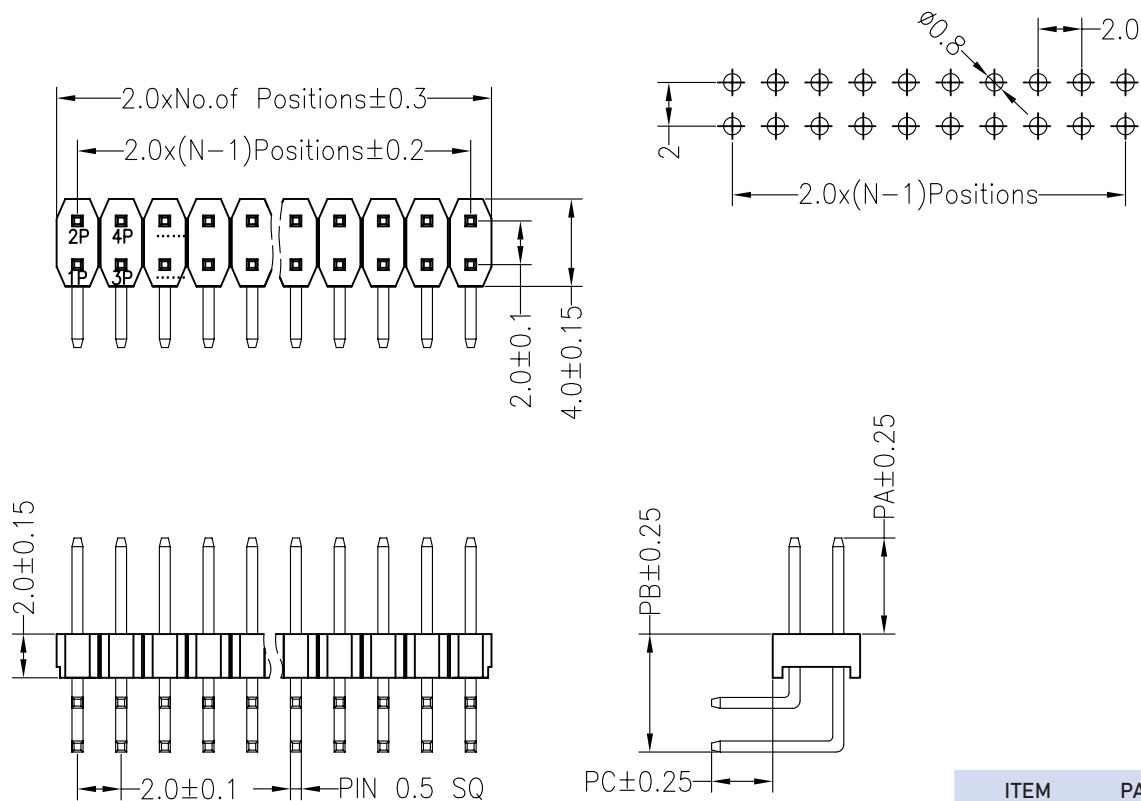

ITEM	PA	PB	PC
Standard	4.00	5.40	2.80
Alternate			