



RoHS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER



Pin Header 3.96mm 1 Row H=3.2mm Stack Straight Type

Specifications

Current Rate:7 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C

Material

Insulator:Polyster,UL 94V-0


©Standard:LCP

Terminal:Copper Alloy

Plating:Tin Plated




Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

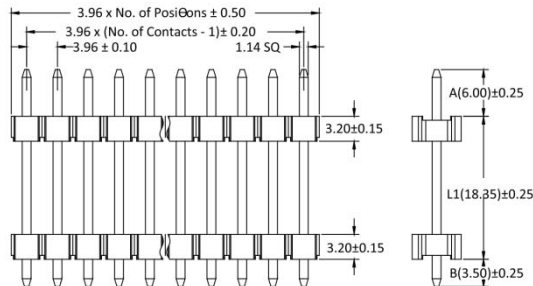

Part No.:PH396D32-1XX-X

ORDER INFORMATION

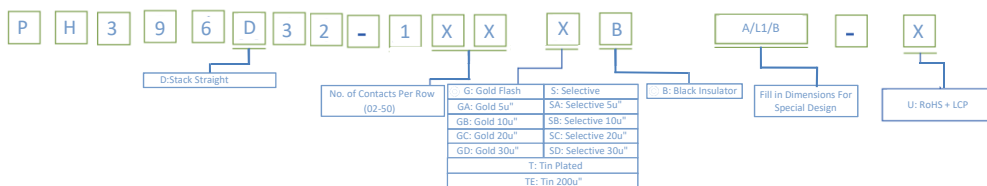

©:Standard Recommend

