



RoHS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER





Pin Header 3.96mm 1 Row H=3.2mm SMT Type

Specifications



Current Rate:3 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

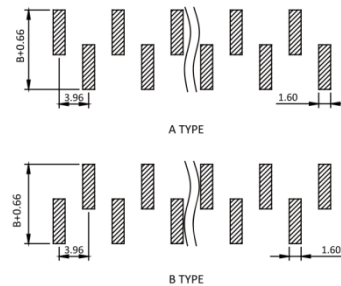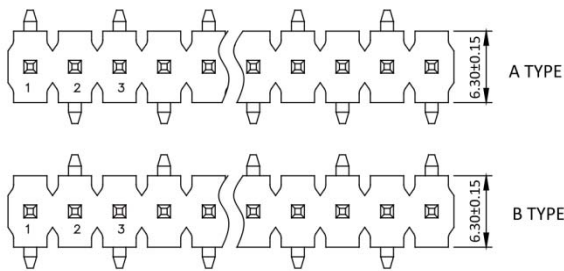


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

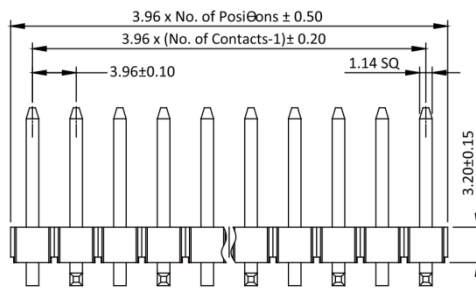

Part No.:PH396M32-1XX-X

ORDER INFORMATION

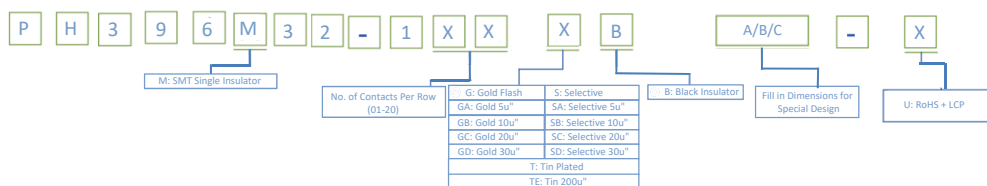

©:Standard Recommend

