




## Pin Header 1.27mm 2 Row H=1.7mm Stack Straight Type

### Specifications


Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated

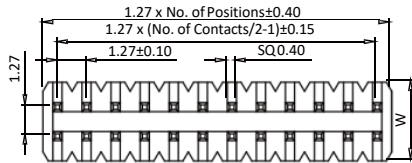


H=2.50mm	Dimensions		
	W	A	B
H=0.85mm	3.40	3.00 or 4.00	2.30
H=1.70mm			
H=2.00mm	3.00		

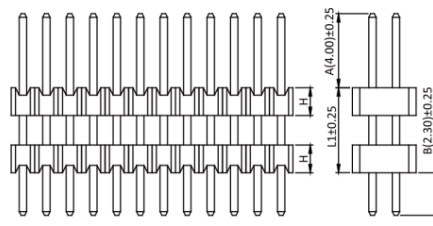

PH3D17-2XX-U

## ORDER INFORMATION

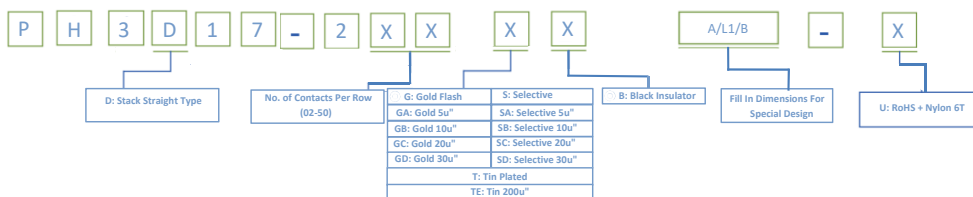

©: Standard Recommend

