

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



Pin Header 1.27mm 1 Row H=2.0mm Stack Straight Type

Specifications


Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated




	Dimensions		
	W	A	B
H=1.00mm	2.00	3.00	2.30
H=1.50mm			
H=1.70mm	2.50	or	2.30
H=2.00mm		4.00	
H=2.50mm			

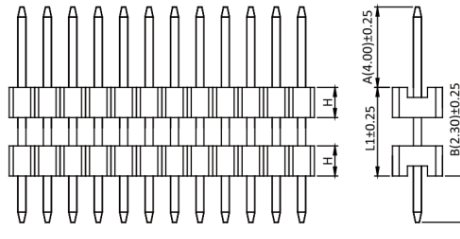

PH3D20-1XX-U

ORDER INFORMATION

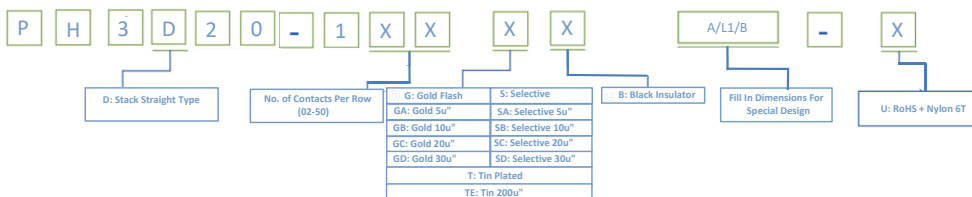

◎: Standard Recommend

Pin-Female Header 1.27 mm



RoHS