

# P in-Female Header 1.27 mm



ROHS

Pin Header 1.27mm 2 Row H=2.5mm Stack Straight Type

TOPTTEK®  
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

## Specifications


Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

## Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated

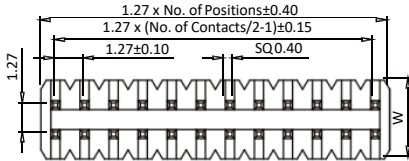


	Dimensions		
	W	A	B
H=0.85mm	3.40	3.00 or 4.00	2.30
H=1.00mm			
H=1.50mm			
H=1.70mm	3.00	3.00 or 4.00	2.30
H=2.00mm			
H=2.50mm			

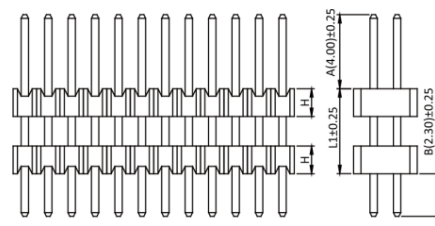

.PH3D25-2XX-U

## ORDER INFORMATION

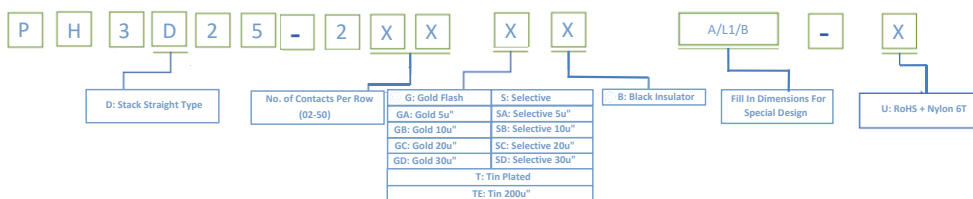

©: Standard Recommend