

P in-Female Header 1.27 mm



ROHS

Pin Header 1.27mm 1 Row H=2.5mm Stack Straight Type

TOPTTEK®
HARDWARE ELECTRONIC MANUFACTURER


www.toptek-co.com

Specifications


Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated




	Dimensions		
	W	A	B
H=1.00mm	2.00	3.00	2.30
H=1.50mm			
H=1.70mm	2.50	or	2.30
H=2.00mm		4.00	
H=2.50mm			

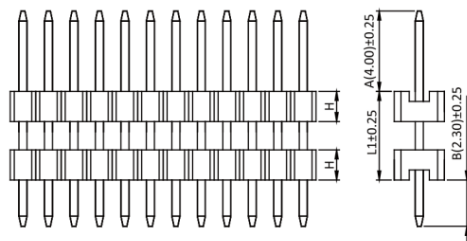

PH3D25-1XX-U

ORDER INFORMATION

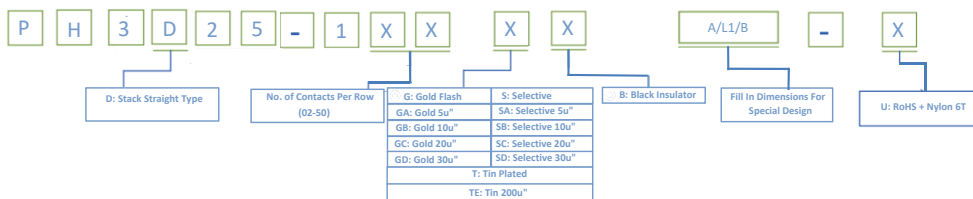

©: Standard Recommend