

CONNECTOR MANUFACTURERS







Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=0.85mm Stack SMT Type

Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated




①: Standard Dimensions

	Dimensions		
	W	A	B C
H=0.85mm	3.40	3.00 or 4.00	1.30
H=1.00mm			1.50
H=1.50mm	3.00	5.50	2.00
H=1.70mm			2.20
H=2.00mm			2.50
H=2.50mm	3.00	3.00	

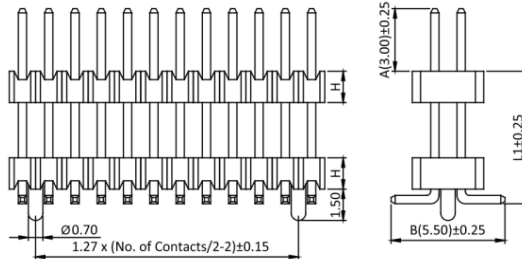

Part No.: PH3DM08-2XX-U

ORDER INFORMATION

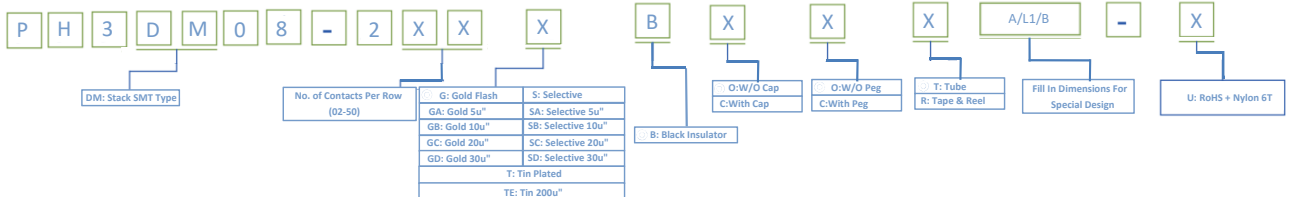

①: Standard Recommend

Pin-Female Header 1.27 mm



ROHS