

# CONNECTOR MANUFACTURERS





Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=1.5mm Stack SMT Type

### Specifications

Current Rate:1 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

### Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal:Copper Alloy  
 Plating:Gold Plated

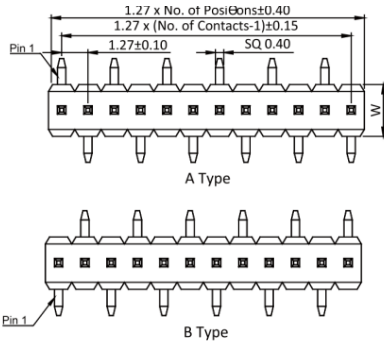



◎:Standard Dimensions

	Dimensions			C
	W	A	B	
H=1.00mm	2.10	3.00	5.00	1.50
H=1.50mm	2.50	4.00		2.00
H=2.00mm			2.50	
H=2.50mm			3.00	

Pin-Female Header 1.27 mm




ROHS

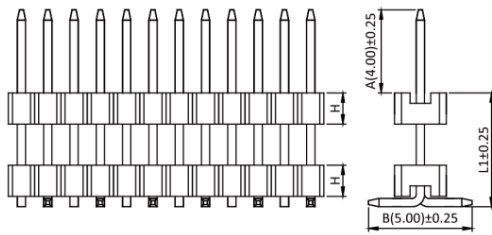

Part No.:PH3DM15-1XX-U

## ORDER INFORMATION

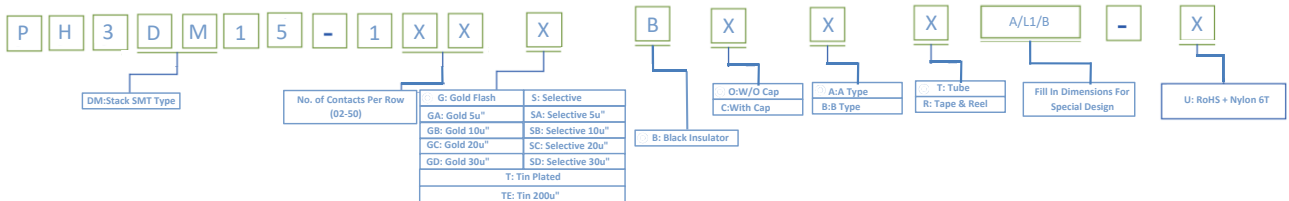

◎:Standard Recommend