

Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=1.7mm Stack SMT Type

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER





www.toptek-co.com

Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C


Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated




⊗:Standard Dimensions

	Dimensions			
	W	A	B	C
H=0.85mm	3.40	3.00 or 4.00	5.50	1.30
H=1.00mm				1.50
H=1.50mm				2.00
H=1.70mm	3.00	4.00	5.50	2.20
H=2.00mm				2.50
H=2.50mm				3.00

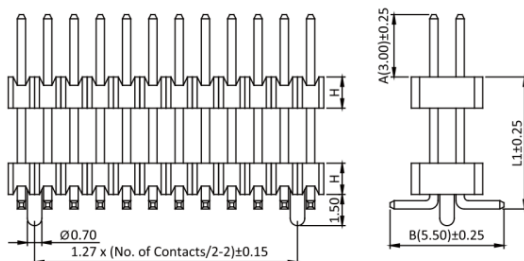

Part No.:PH3DM17-2XX-U

ORDER INFORMATION

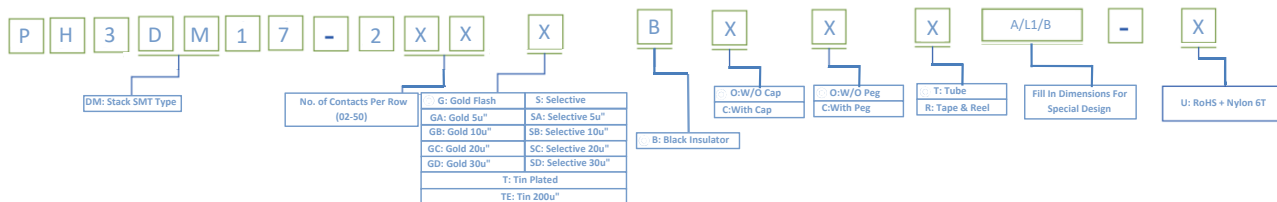

⊗:Standard Recommend