

# Pin-Female Header 1.27 mm



ROHS

Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=2.5mm Stack SMT Type

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER







www.toptek-co.com

## Specifications

Current Rate:1 AMP  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:20mΩ Max.  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-40°C to +105°C


## Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
Terminal:Copper Alloy  
Plating:Gold Plated




◎:Standard Dimensions

	Dimensions			
	W	A	B	C
H=0.85mm	3.40	3.00 or 4.00	5.50	1.30
H=1.00mm				1.50
H=1.50mm				2.00
H=1.70mm				2.20
H=2.00mm	3.00			2.50
H=2.50mm				3.00

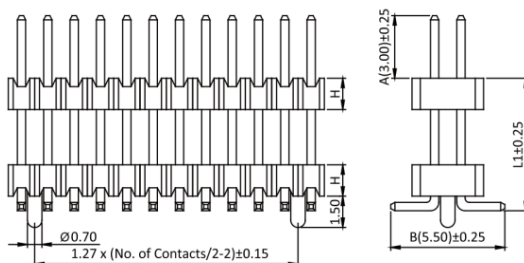

Part No.:PH3DM25-2XX-U

## ORDER INFORMATION

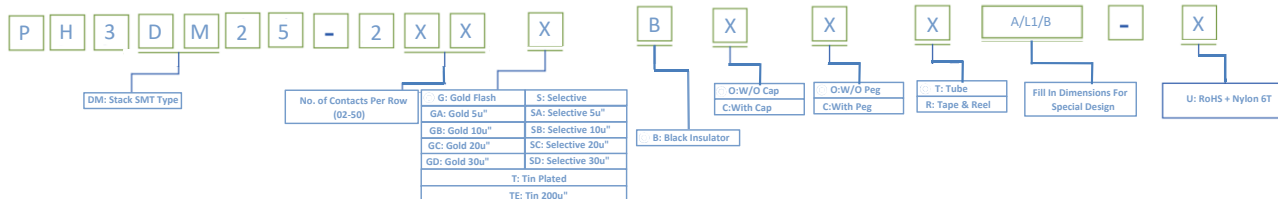

◎:Standard Recommend