

CONNECTOR MANUFACTURERS



TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=2.5mm Stack SMT Type



Specifications
 Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material
 Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

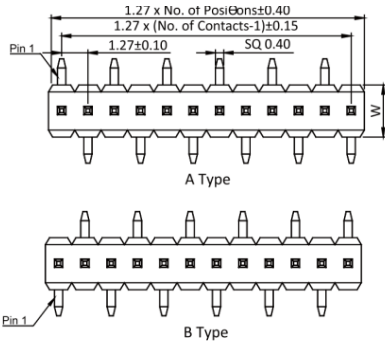

⊗: Standard Dimensions

	Dimensions		
	W	A	B
H=1.00mm	2.10	3.00	5.00
H=1.50mm			1.50
H=2.00mm			2.00
H=2.50mm	2.50	4.00	2.50
			3.00

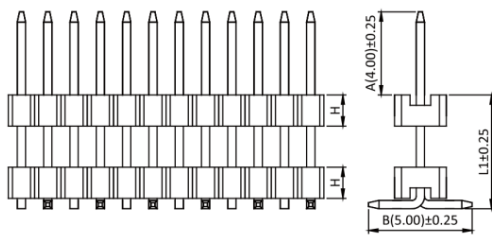


Pin-Female Header 1.27 mm



ROHS

Part No.: PH3DM25-1XX-U

ORDER INFORMATION

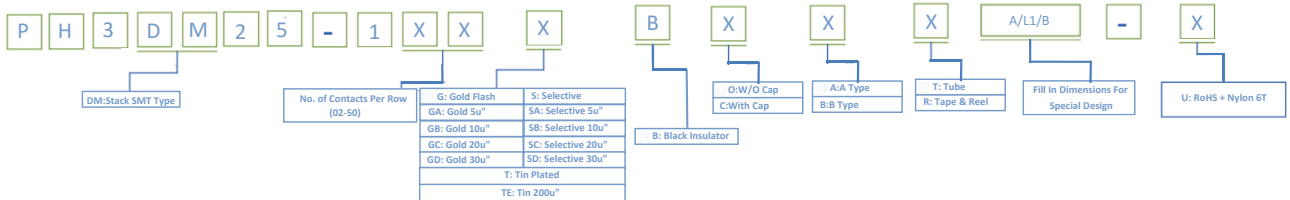

⊗: Standard Recommend