

Pin-Female Header 1.27 mm



ROHS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER



www.toptek-co.com




Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=1.0mm SMT Type,

Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

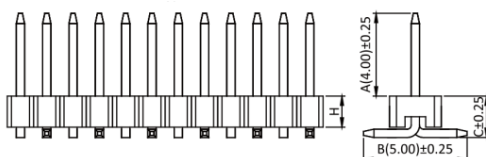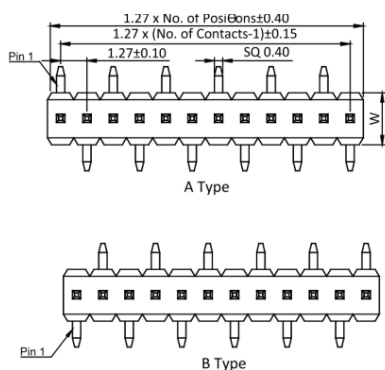


①:Standard Dimensions

	W	A	B	C
H=1.00mm	2.10	3.00	5.00	1.50
H=1.50mm				2.00
H=2.00mm	2.50	4.00		2.50
H=2.50mm				3.00

Part No.:PH3M10-1XX-U

ORDER INFORMATION

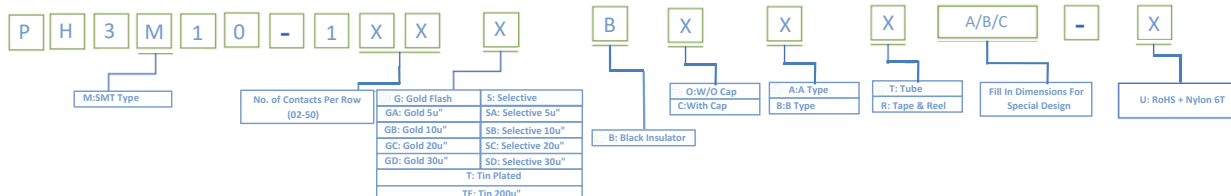

©:Standard Recommend