

Pin-Female Header 1.27 mm



RoHS

Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=2.0mm SMT Type,

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER






www.toptek-co.com

Specifications

Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

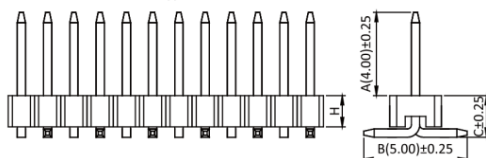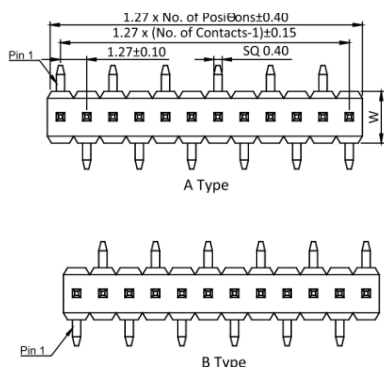


Standard Dimensions

	W	A	B	C
H=1.00mm		3.00	5.00	1.50
H=1.50mm	2.10			2.00
H=2.00mm	2.50	4.00		2.50
H=2.50mm				3.00

Part No.: PH3M20-1XX-U

ORDER INFORMATION

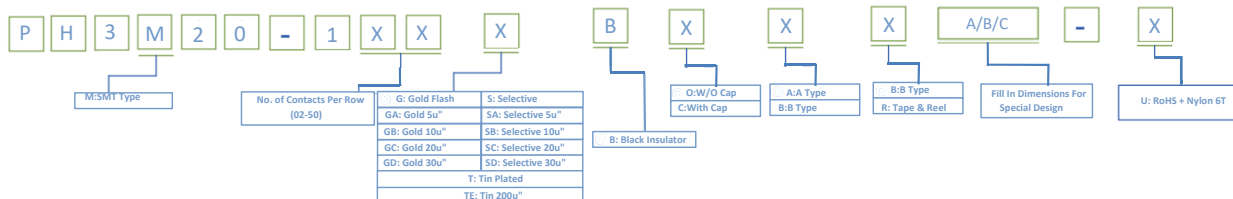

Standard Recommend