

Pin Header 1.27mm SQ Pin=0.4mm 2 Row H=2.5mm SMT Type

Specifications
Current Rate:1 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:500V AC for one minute




Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0


Terminal:Copper Alloy

Plating:Gold Plated




Standard Dimensions

	Dimensions			C
	W	A	B	
H=0.85mm	3.40	3.00 or 4.00	5.50	1.30
H=1.00mm				1.50
H=1.50mm	3.00	4.00	5.50	2.00
H=1.70mm				2.20
H=2.00mm				2.50
H=2.50mm	3.00			3.00

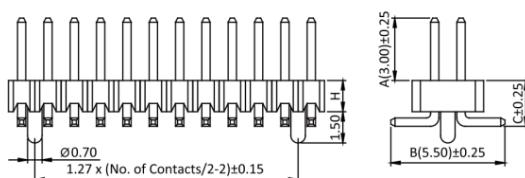

Part No.:PH3M25-2XX-U

ORDER INFORMATION

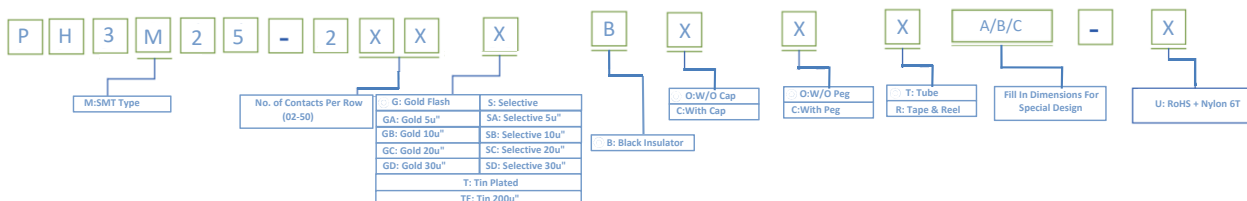

Standard Recommend