




CONNECTOR MANUFACTURERS



Pin Header 1.27mm SQ Pin=0.4mm 1 Row H=2.5mm SMT Type,

Specifications
 Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

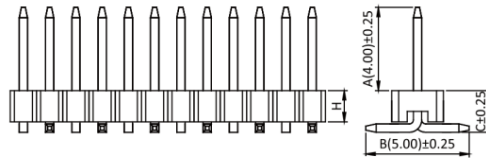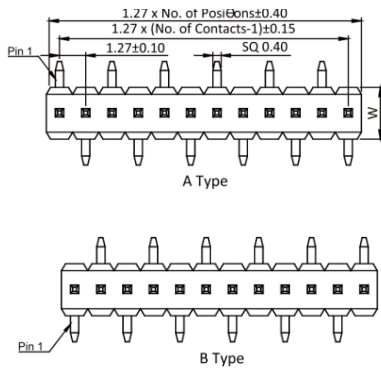

◎:Standard Dimensions

	W	A	B	C
H=1.00mm	2.10	3.00	5.00	1.50
H=1.50mm				2.00
H=2.00mm				2.50
H=2.50mm	2.50	4.00		3.00


Pin-Female Header 1.27 mm



ROHS

Part No.:PH3M25-1XX-U

ORDER INFORMATION

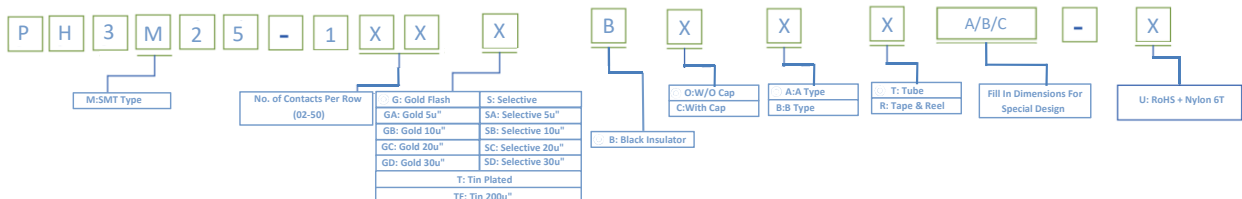

◎:Standard Recommend