

# CONNECTOR MANUFACTURERS

**TOPTEK®**  
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com




Pin Header 1.27mm SQ Pin=0.4mm 2 Row H=2.5mm SMT R/A Type

## Specifications

Current Rate:1 AMP  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:20mΩ Max.  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-40°C to +105°C


## Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
Terminal:Copper Alloy  
Plating:Gold Plated

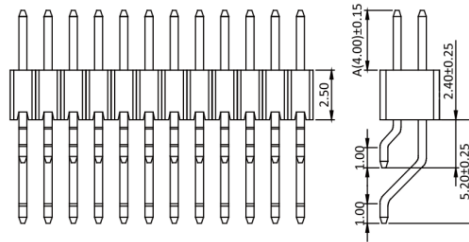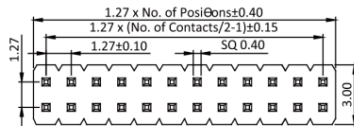

Part No.:PH3MR-2XX-U

## ORDER INFORMATION

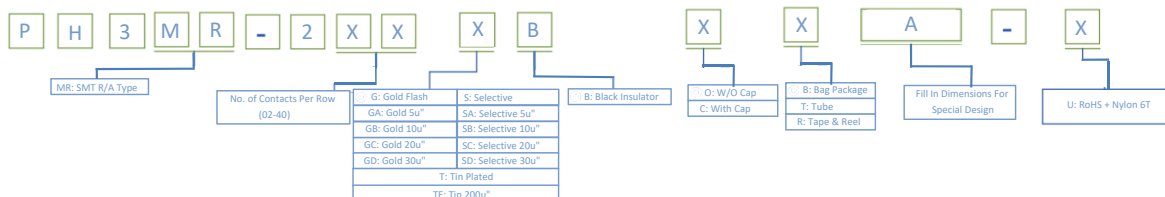

©:Standard Recommend



RoHS