

# CONNECTOR MANUFACTURERS

**TOPTEK®**  
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com


## Pin Header 1.27mm 1 Row H=1.0mm Right Angle

### Specifications

Current Rate: 1 AMP  
Insulation Resistance: 1000MΩ Min.  
Contact Resistance: 20mΩ Max.  
Dielectric Voltage: 500V AC for one minute  
Operation Temperature: -40°C to +105°C




### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
Terminal: Copper Alloy  
Plating: Gold Plated




◎: Standard Dimensions

	Dimensions			
	W	A	B	C
H=1.00mm	2.10	4.00	2.40	1.50
H=1.50mm				2.00
H=2.00mm	2.50			3.00

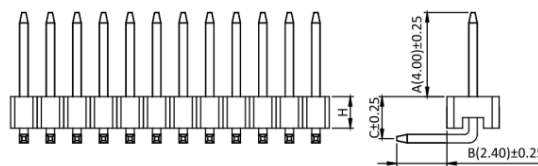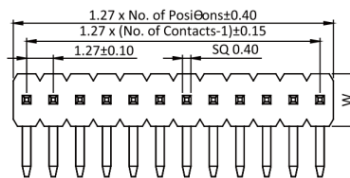

PH3R10-1XX-U

## ORDER INFORMATION

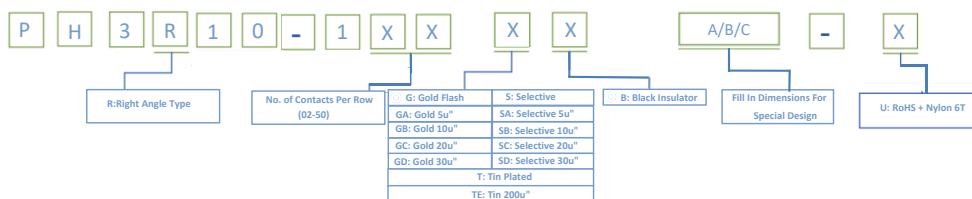

◎: Standard Recommend



RoHS