




## Pin Header 1.27mm 2 Row H=1.7mm Right Angle

### Specifications


Current Rate:1 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

### Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal:Copper Alloy  
 Plating:Gold Plated

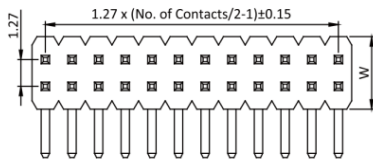


	Dimensions			
	W	A	B	C
H=1.00mm	3.40	4.00	2.40	1.50
H=1.50mm				2.00
H=1.70mm	3.00	4.00	2.40	2.20
H=2.00mm				2.50
H=2.50mm				3.00

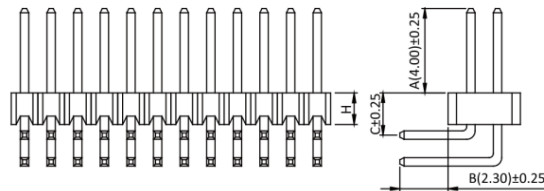

PH3R17-2XX-U

## ORDER INFORMATION

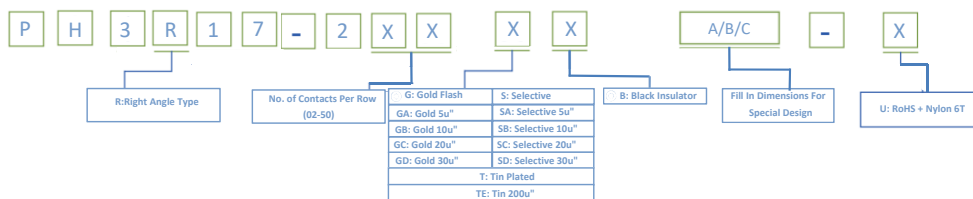

©:Standard Recommend

