

CONNECTOR MANUFACTURERS






Pin Header 1.27mm 2 Row H=2.0mm Right Angle

Specifications


Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

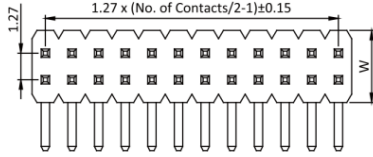


	Dimensions			
	W	A	B	C
H=1.00mm	3.40	4.00	2.40	1.50
H=1.50mm				2.00
H=1.70mm	2.20			
H=2.00mm	2.50			
H=2.50mm	3.00			3.00

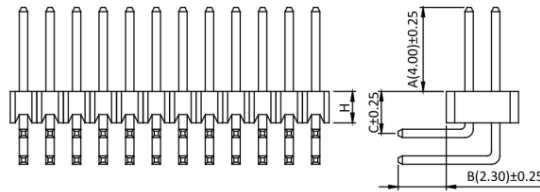

PH3R20-2XX-U

ORDER INFORMATION

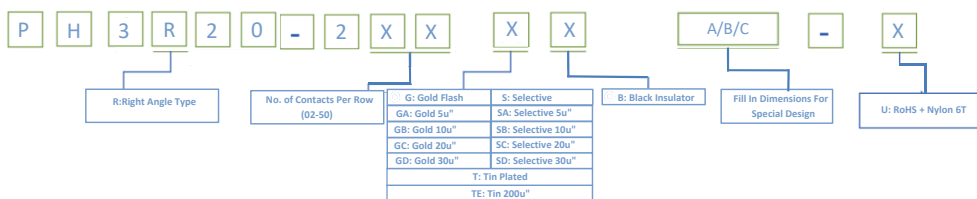

©:Standard Recommend



ROHS