



# in-Female Header 1.27 mm



ROHS



## Pin Header 1.27mm 2 Row H=1.5mm Straight Type

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER





www.toptek-co.com

### Specifications

- Current Rate: 1 AMP
- Insulation Resistance: 1000MΩ Min.
- Contact Resistance: 20mΩ Max.
- Dielectric Voltage: 500V AC for one minute
- Operation Temperature: -40°C to +105°C


### Material

- Insulator: Hi-Temp. Thermoplastic, UL 94V-0
- Terminal: Copper Alloy
- Plating: Gold Plated




Standard Dimensions  
0.85mm For PH3S only

	Dimensions		
	W	A	B
H=0.85mm	3.40	3.00	2.30
H=1.00mm		or	
H=1.50mm			
H=1.70mm	3.00		
H=2.00mm		3.00	
H=2.50mm			

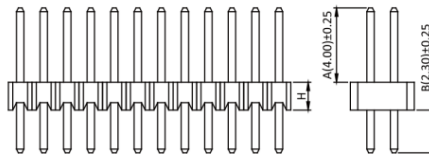

PH3S15-2XX-U

## ORDER INFORMATION

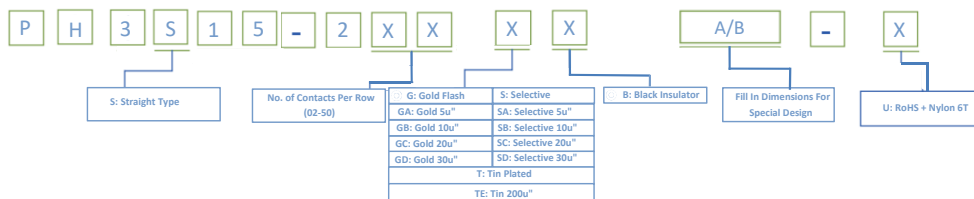

Standard Recommend

