

Pin Header 1.27mm 1 Row H=1.5mm Straight Type





Specifications


Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated




	Dimensions		
	W	A	B
H=1.00mm	2.00	3.00	2.30
H=1.50mm			
H=1.70mm	2.50	4.00	
H=2.00mm			
H=2.50mm			

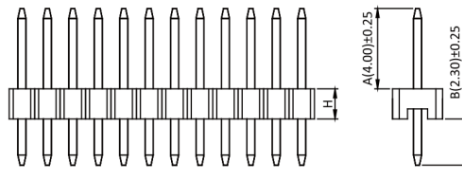

PH3S15-1XX-U

ORDER INFORMATION

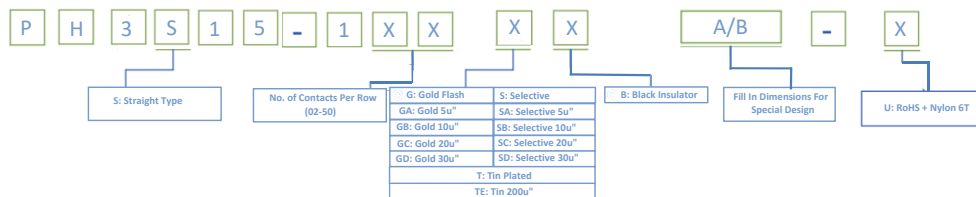

©:Standard Recommend

