

# CONNECTOR MANUFACTURERS





## Pin Header 1.27mm 1 Row H=1.7mm Straight Type

### Specifications


Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated




	Dimensions		
	W	A	B
H=1.00mm	2.00	3.00 or	2.30
H=1.50mm			
H=1.70mm	2.50	4.00	
H=2.00mm			
H=2.50mm			

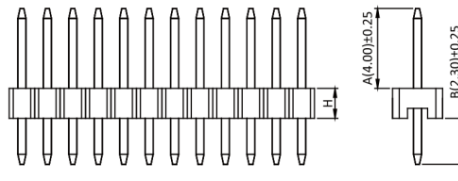

PH3S17-1XX-U

## ORDER INFORMATION

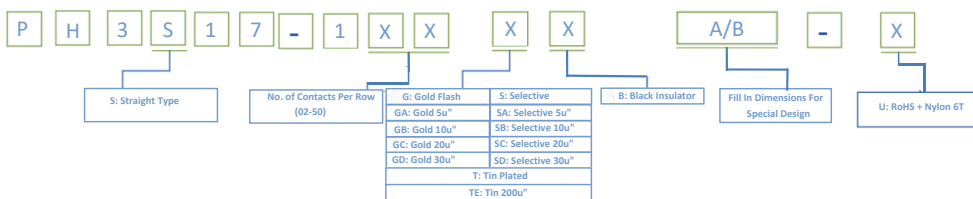

©: Standard Recommend

