

P in-Female Header 1.27 mm



ROHS

Pin Header 1.27mm 2 Row H=2.0mm Straight Type

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated




Standard Dimensions
0.85mm For PH3S only

	Dimensions		
	W	A	B
H=0.85mm	3.40	3.00 or 4.00	2.30
H=1.00mm			
H=1.50mm			
H=1.70mm			
H=2.00mm	3.00		
H=2.50mm			

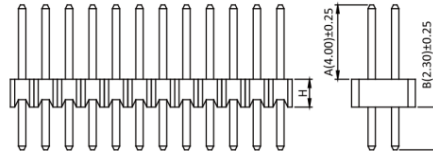

PH3S20-2XX-U

ORDER INFORMATION

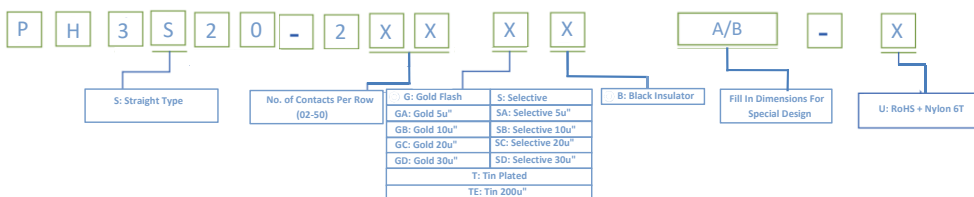

©: Standard Recommend