

## Pin Header 1.27mm 1 Row H=2.0mm Straight Type





### Specifications


Current Rate:1 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

### Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal:Copper Alloy  
 Plating:Gold Plated




	Dimensions		
	W	A	B
H=1.00mm	2.00	3.00	2.30
H=1.50mm			
H=1.70mm	or		
H=2.00mm	2.50	4.00	
H=2.50mm			

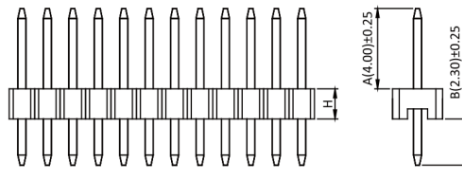

PH3S20-1XX-U

## ORDER INFORMATION

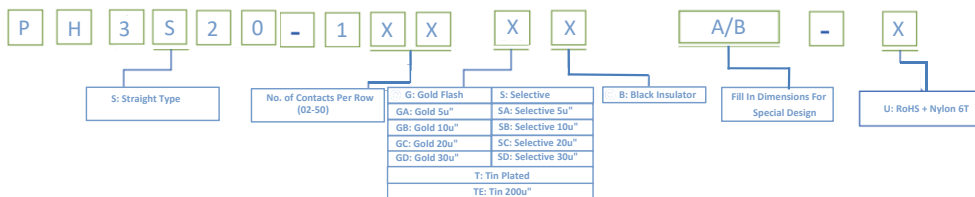

©:Standard Recommend

