

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



Pin Header 1.27mm 2 Row H=2.5mm Straight Type

Specifications

Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated




Standard Dimensions
0.85mm For PH3S Only

	Dimensions		
	W	A	B
H=0.85mm	3.40	3.00 or 4.00	2.30
H=1.00mm			
H=1.50mm			
H=1.70mm	3.00	3.00 or 4.00	2.30
H=2.00mm			
H=2.50mm			

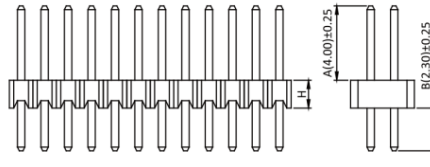

PH3S25-2XX-U

ORDER INFORMATION

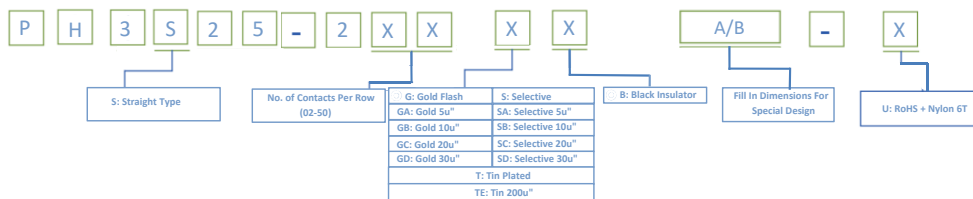

Standard Recommend

Pin-Female Header 1.27 mm



RoHS