




PinHeader 1.27mm SQ Pin=0.4 6mm 1 Row H=1.7/2.5mm Stack Straight Type

Specifications


Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated




Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

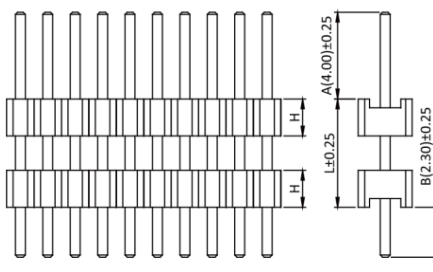

Part No.: PH4D17/20/25-1XX-U

ORDER INFORMATION

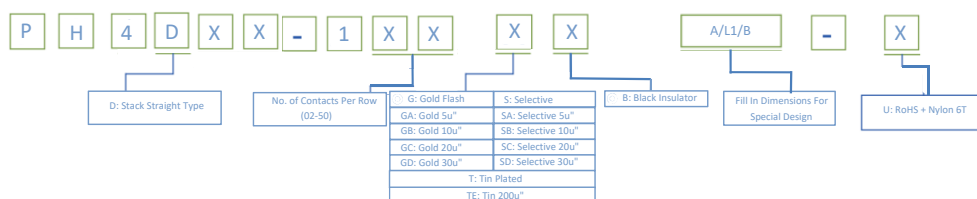

©: Standard Recommend

