

P in-Female Header 1.27 mm



ROHS



TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com


PinHeader1.27mmSQPin=0.4 6mm 1 Row H=2.0mm Stack Straight Type

Specifications
 Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated




Recommended PCB Layout
 (PCB TOLERANCE ±0.05)

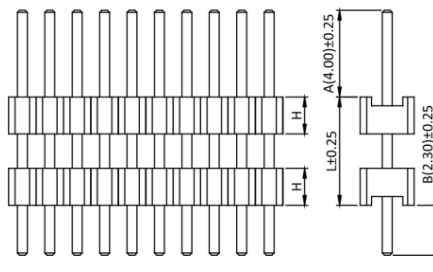

Part No.:PH4D20-1XX-U

ORDER INFORMATION

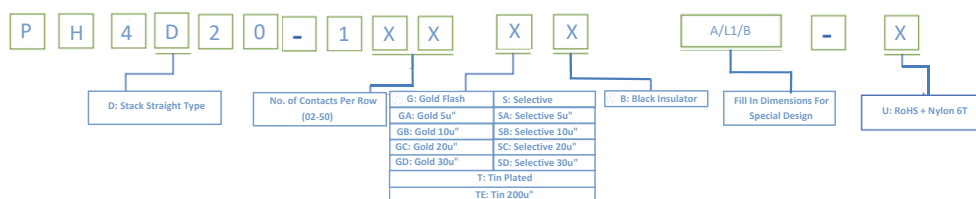

©:Standard Recommend

