

P in-Female Header 1.27 mm



RoHS

Pin Header 1.27mm SQ Pin=0.46mm 2 Row H=1.7mm Stack SMT Type

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER



Specifications

Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

www.toptek-co.com




	Dim. C
H=1.7mm	2.20
H=2.5mm	3.00

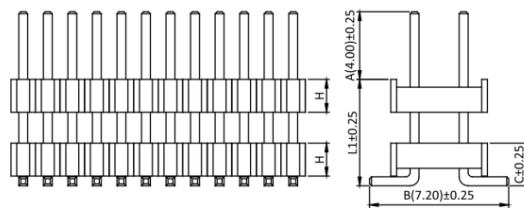

Part No.: PH4DM17-2XX-U

ORDER INFORMATION

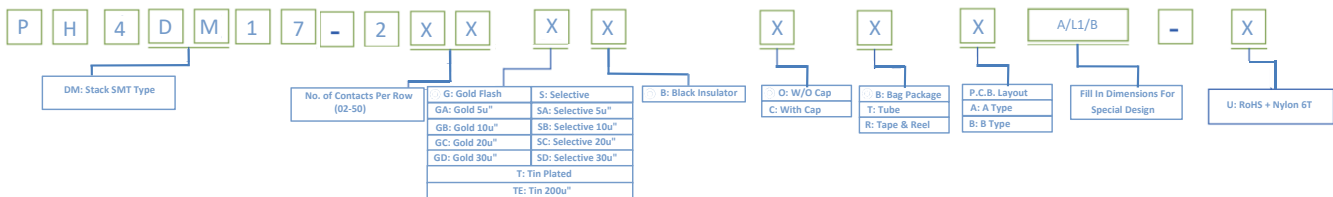

©: Standard Recommend