




Pin Header 1.27mm SQ Pin=0.46mm 1 Row H=2.5mm SMT R/A Type

Specifications



Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated




Recommended PCB Layout
(PCB TOLERANCE ±0.05)



Part No.:PH4MR-1XX-U

ORDER INFORMATION

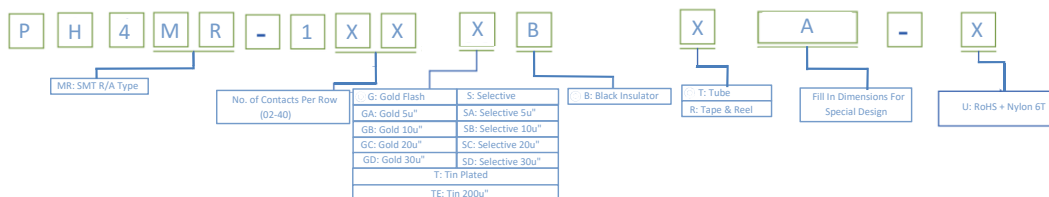

©:Standard Recommend