

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



Pin Header 1.27mm SQ Pin=0.46mm 2 Row H=2.5mm Right Angle

Specifications



Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

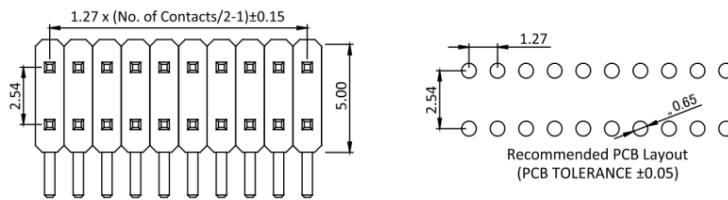


	Dim. C
H=1.7mm	2.20
H=2.5mm	3.00



Part No.:PH4R25-2XX-U

ORDER INFORMATION

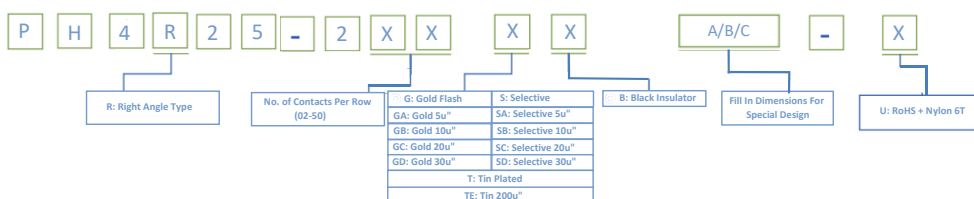

©:Standard Recommend



ROHS