

# CONNECTOR MANUFACTURERS





## Pin Header 1.27mm SQ Pin=0.46mm 1 Row H=2.5mm Right Angle

### Specifications


Current Rate: 1 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 500V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated




	Dim. C
H=1.7mm	2.20
H=2.5mm	3.00

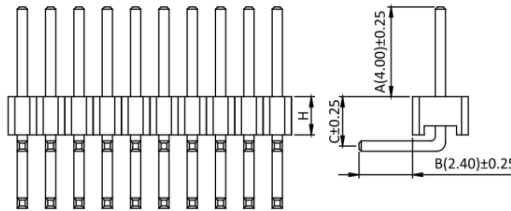

Part No.: PH4R25-1XX-U

## ORDER INFORMATION

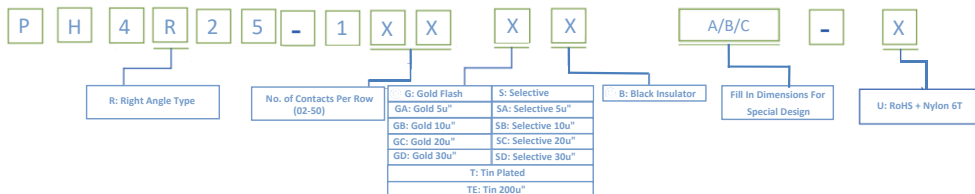

©: Standard Recommend



ROHS