



in-Female Header 1.27 mm



ROHS

PinHeader1.27mmSQPin=0.4 6mm 1 Row H=1.7mmStraight Type




Specifications


Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated




Recommended PCB Layout (PCB TOLERANCE ±0.05)

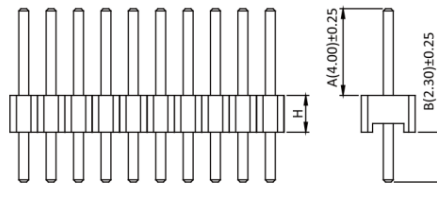

Part No.:PH4S17-1XX-U

ORDER INFORMATION

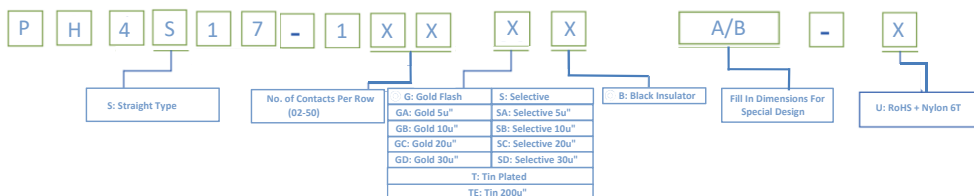

©:Standard Recommend

