



RoHS






TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER



Pin Header 0.8mm 2 Row H=1.4mm Stack Straight Type


Specifications
 Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

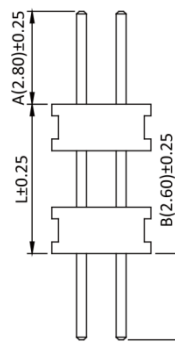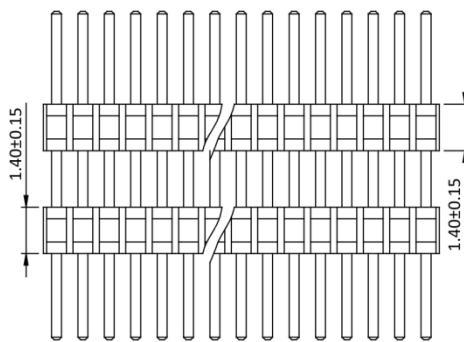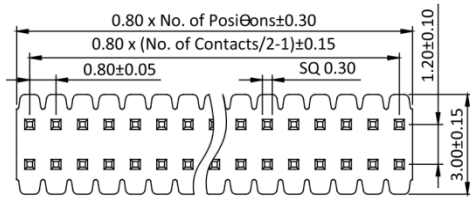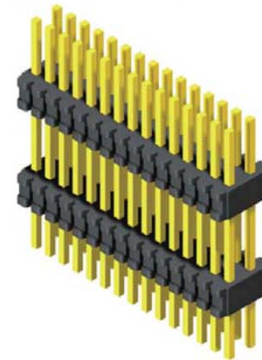

ORDER INFORMATION

Part No.:PH6D14-2XX-U

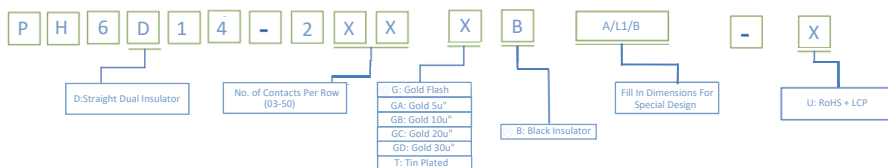

©:Standard Recommend

