

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

 www.toptek-co.com



Pin Header 0.8mm 2 Row H=1.4mm Stack SMT Type

Specifications



Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:500V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

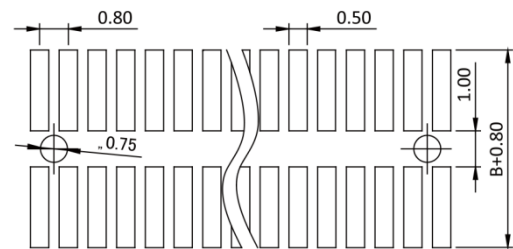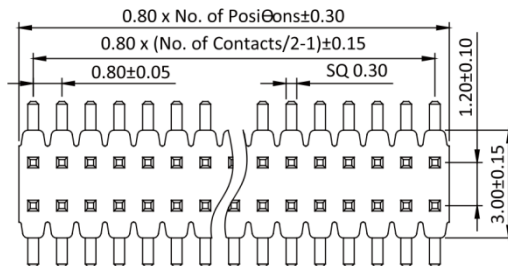


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

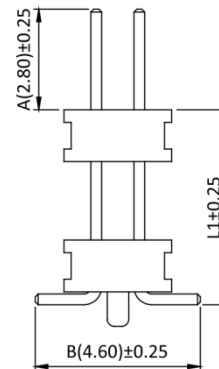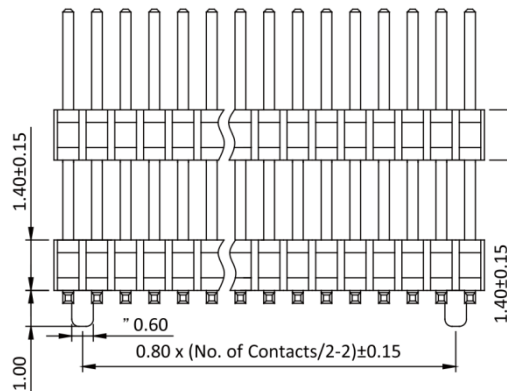

Part No.:PH6DM14-2XX-U

ORDER INFORMATION

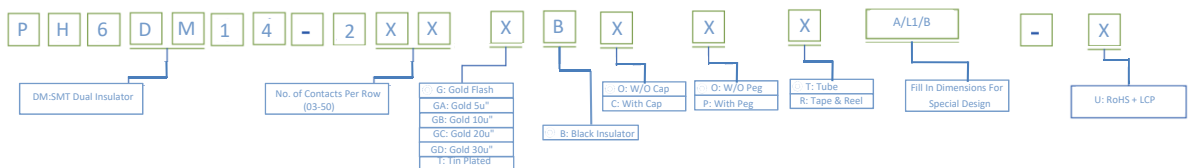

©:Standard Recommend

www.toptek-co.com

info@toptek-co.com

RoHS