



ROHS




# Pin Header 0.8mm 2 Row H=1.4mm SMT Type

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER




Specifications  
 Current Rate:1 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

Material  
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal:Copper Alloy  
 Plating:Gold Plated

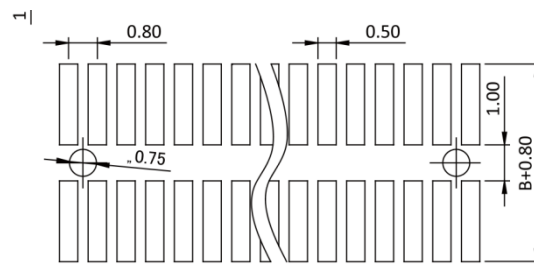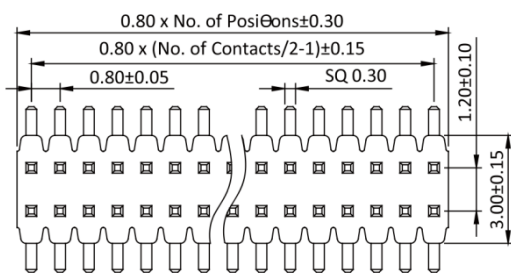


Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

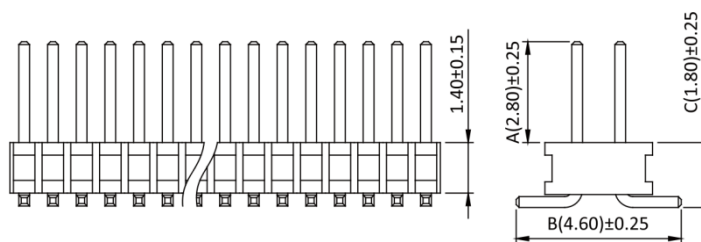

Part No.:PH6M14-2XX-U

## ORDER INFORMATION

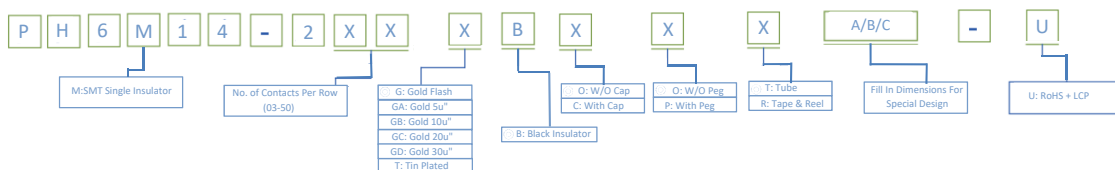

©:Standard Recommend

