

CONNECTOR MANUFACTURERS

TOPTTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com





Pin Header 0.8mm 2 Row H=1.4mm Straight

Specifications

Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

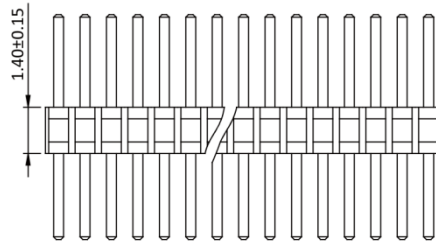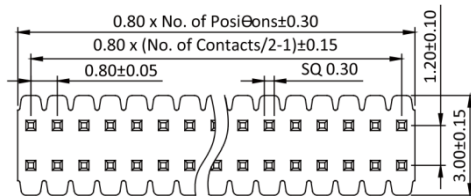

Part No.: PH6S14-2XX-U

ORDER INFORMATION

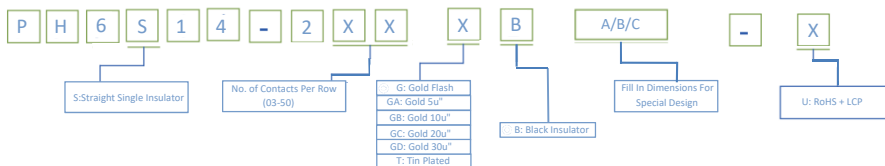

©: Standard Recommend



RoHS