



RoHS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER





Pin Header 5.08mm 1 Row H=2.5mm Stack Straight

Specifications

Current Rate:7 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C


Material

Insulator:Polyster,UL 94V-0
©Standard:LCP
Terminal:Copper Alloy
Plating:Tin Plated

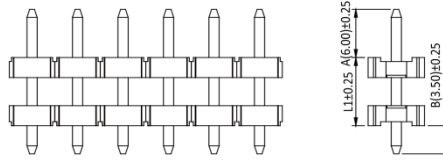

Part No.:PH8D25-1XX-X

ORDER INFORMATION

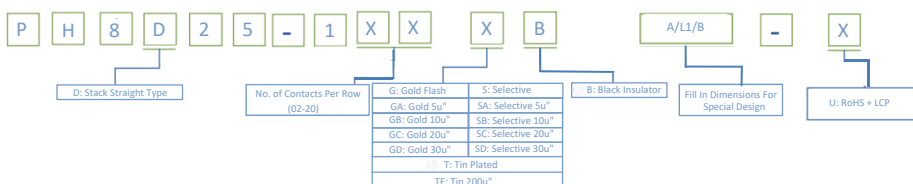

©:Standard Recommend

