

# CONNECTOR MANUFACTURERS

**TOPTEK®**  
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



## Pin Header 5.08mm 1 Row H=2.5mm Right Angle Type

### Specifications

Current Rate: 7 AMP  
Insulation Resistance: 1000MΩ Min.  
Contact Resistance: 20mΩ Max.  
Dielectric Voltage: 1000V AC for one minute  
Operation Temperature: -40°C to +105°C


### Material

Insulator: Polyester, UL 94V-0  
©Standard: LCP  
Terminal: Copper Alloy  
Plating: Tin Plated

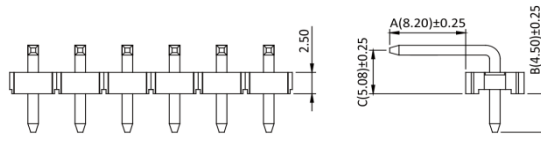

Part No.: PH8RU25-1XX-X

## ORDER INFORMATION

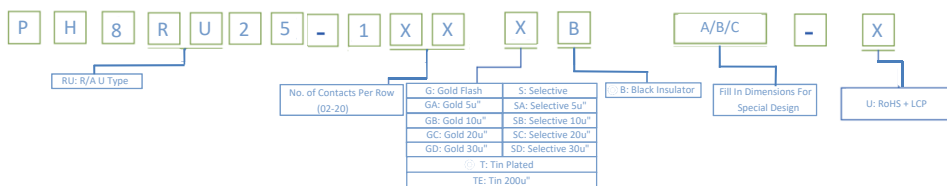

©: Standard Recommend

