

CONNECTOR MANUFACTURERS

TOPTTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

Pin Header 5.08mm 1 Row H=2.5mm Straight / Stack Straight

Specifications

Current Rate:7 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:1000V AC for one minute

Operation Temperature:-40°C to +105°C



Material

Insulator:Polyster,UL 94V-0

©Standard:LCP


Terminal:Copper Alloy

Plating:Tin Plated

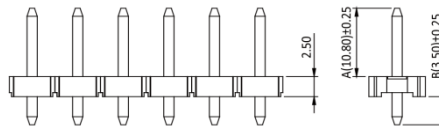

Part No.:PH8S25-1XX-X

ORDER INFORMATION

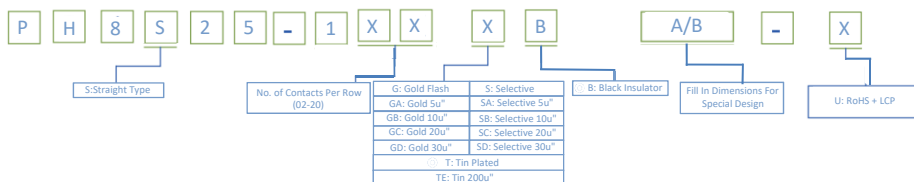

©:Standard Recommend



RoHS