

PIN HEADER 1.27mm

Pin Header 1.27mm 1 Row H=1.0/1.5/1.7/2.0/2.5mm Stack Straight Type

TOPTEK®
HARDWARE ELECTRONIC COMPONENTS




Specifications

Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Max. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated





www.toptek-co.com



ORDER INFORMATION

P	H	X	D	2	5	-	1	X	X	C	N	G	0	S	PA/PB/PC	X
SQ.		PD		No. of Pins Pr Row		Insulator Material Option		N= W/O Post		Contact Plating		PA/ PB/ PC= Pin Lenght		Packing		
3= PIN 0.40 4= PIN 0.46		10= 1.0mm 15= 1.5mm 17= 1.7mm 20= 2.0mm 25= 2.5mm		1x40		A= BK-PBT B= BK-PA66 C= BK-PA6T D= BKPA46 F= BK-LCP				G0= Gold Flash G2= 5U" Gold G3= 10U" Gold G4= 15U" Gold G5= 30U" Gold S0= Gold Flash/ Tin SN= Tin				0= PE Bag A= Tray T= Tube P= Tube+Cap R= Reel+Cap		

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

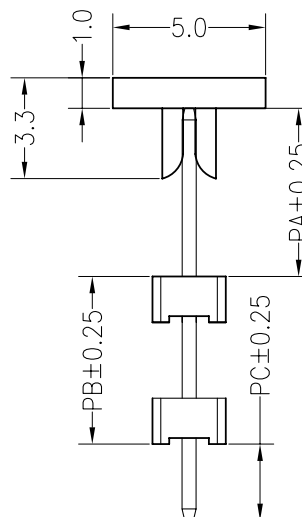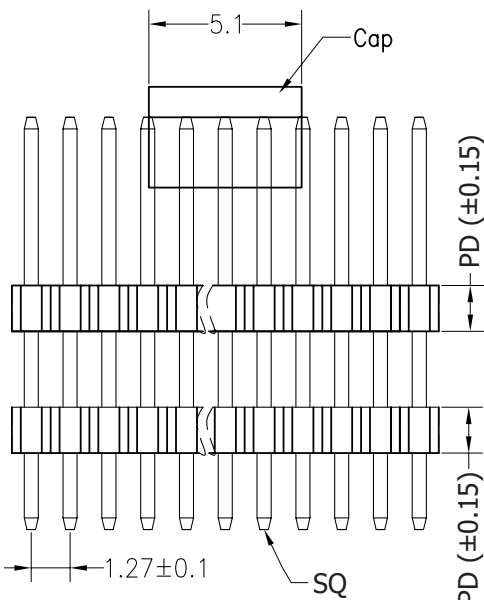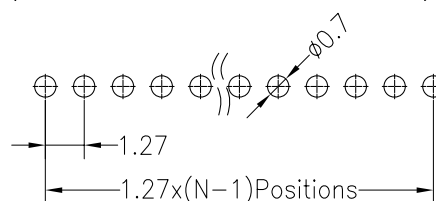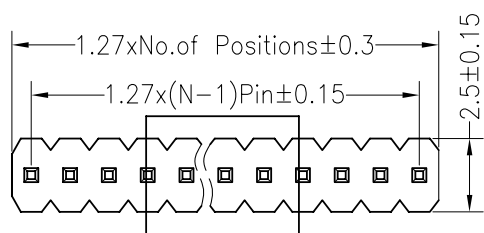

PD
1.00mm
1.50mm
1.70mm
2.00mm
2.50mm

ITEM	PA	PC	PB
Standard	7.80	2.45	7.60
Alternate			