

Pin Header 1.27mm 2 Row H=0.85/1.0/1.5/2.0/2.5mm SMT Type




Specifications

Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Max. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



► ORDER INFORMATION

P H X M 2 5 - 2 X X C N G 0 M PA/PB X

SQ.
3= PIN 0.40
4= PIN 0.46

PD
08= 0.85mm
10= 1.0mm
15= 1.5mm
20= 2.0mm
25= 2.5mm

No.of Pins Pr Row
2x40

Insulator Material Option
A= BK-PBT
B= BK-PA66
C= BK-PA6T
D= BKPA46
E= BK-LCP


N= W/O Post

Contact Plating
G0= Gold Flash
G2= 5U" Gold
G3= 10U" Gold
G4= 15U" Gold
G5= 30U" Gold
S0= Gold Flash/ Tin
SN= Tin

PA/ PB= Pin Lenght

Packing
0= PE Bag
A= Tray
T= Tube
P= Tube+Cap
R= Reel+Cap

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

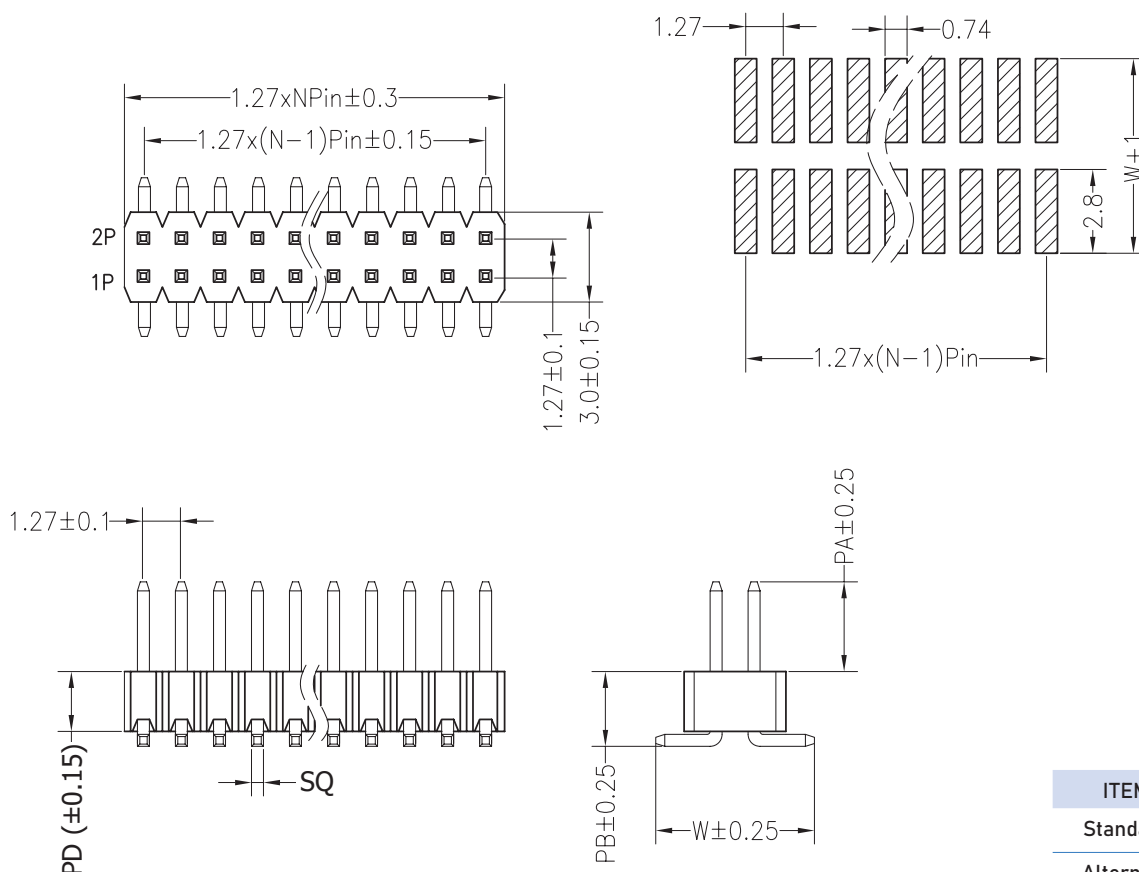

	PD	
	0.85mm	
	1.00mm	
	1.50mm	
	2.00mm	
	2.50mm	
ITEM	PA	PB
Standard	4.00	1.90
Alternate		