

PIN HEADER 1.27mm

Pin Header 1.27mm 1 Row H=2.5mm SMT R/A Type




Specifications


Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Max. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material





Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



ORDER INFORMATION

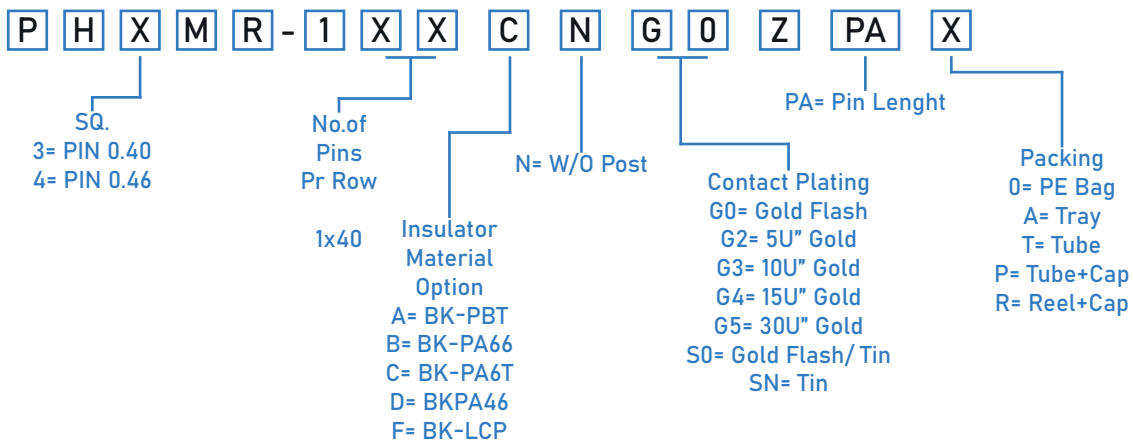

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

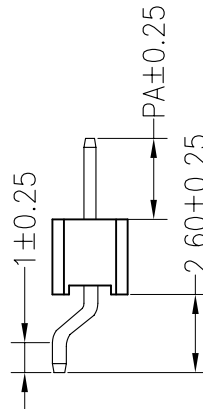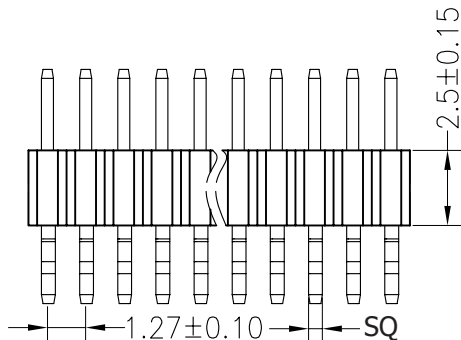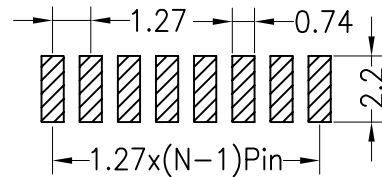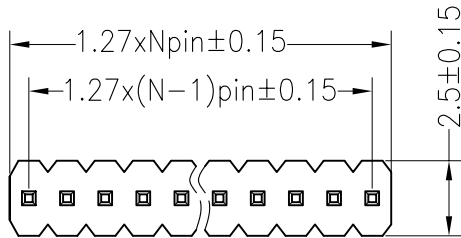

ITEM	PA
Standard	3.00
Alternate	