

CONNECTOR MANUFACTURERS

TOPTek®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



Female Header 2.54mm 2 Row H=3.55mm Dual Entry

Specifications


Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

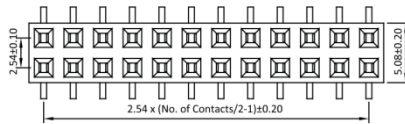


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

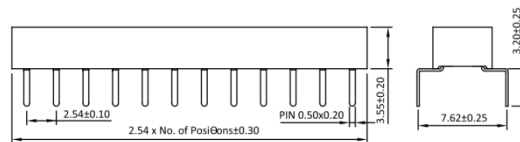

Part No.: PS1M35-2XX-U

ORDER INFORMATION

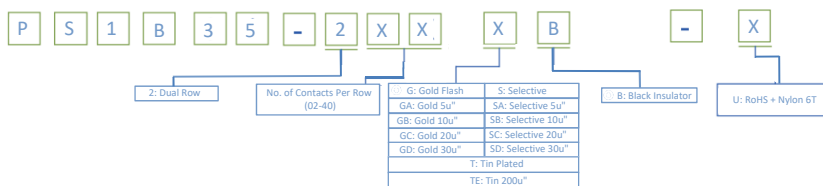

©: Standard Recommend



RoHS